



HYDROCON PERMEABLE CONCRETE PIPES

NON-STANDARD SHAPES & SIZES


ROUND PERMEABLE CONCRETE PIPES

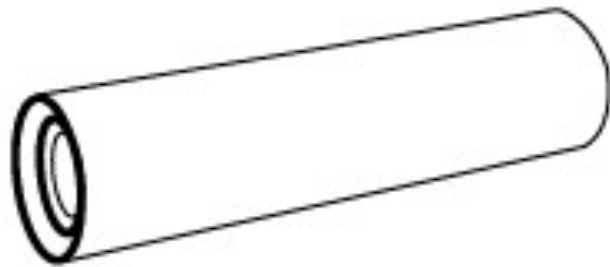

Diameter (d) mm	200	300	400	500
Side (s) mm	30	47.5	50	60
Length (l) mm	750	750	750	750
kg/m	44	99	160	227
kg/pipe approx.	33	74	120	170
Pipe volume m ³ /m	0.031	0.071	0.126	0.196
Pipe volume m ³ /pipe	0.024	0.053	0.094	0.147
Earth displacement m ³ /m		0.119	0.196	323

Also available with sealed base

HEAVY DUTY FLAT BASE PERMEABLE CONCRETE PIPES

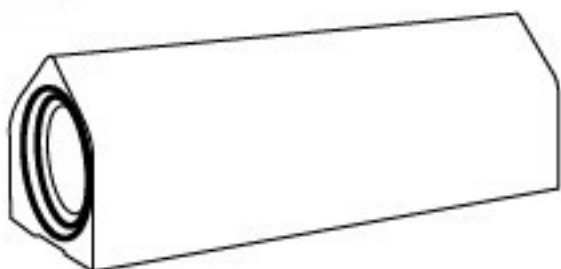

Diameter (d) mm	200	300	400	600
Side 1 (s1) mm	27.5	45	50	70
Side 2 (s2) mm	55	80	105	190
Length (l) mm	750	750	750	1000
Foot (f) mm	270	405	520	770
Foot 1 (f1) mm	77	115	149	220
Foot 2 (f2) mm	116	175	222	330
Height (h) mm	290	430	560	870
kg/m	64	137	254	580
kg/pipe approx.	48	103	190	580
Pipe volume m ³ /m	0.031	0.071	0.126	0.283
Pipe volume m ³ /pipe	0.024	0.053	0.094	0.283
Earth displacement m ³ /m	0.063	0.138	0.250	0.551

Also available with sealed base

SURFACE DRAINS WITH PERMEABLE CONCRETE BASE & NON-PERMEABLE CONCRETE COVER



d	400
s	50
l	500
kg/m	140

Permeability and strength data is based on German testing and compliance to German standards.

Lead time on placement of an order is normally 8 – 10 weeks. Mandatory treatment for brown marmorated stink bug (BMSB) applies to shipments arriving from 1 September through to 30 April.